


DEFINITY™

PROGRESSIVE LENSES

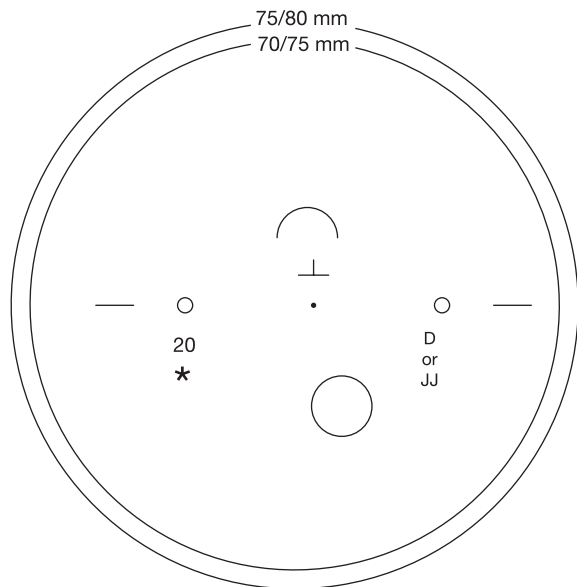


TRANSITIONS® 1.50, POLYCARBONATE TRANSITIONS®, AND POLARIZED 1.50

PARAMETERS

Material	Base Curve	Diameter
TRANSITIONS® 1.50	2.00, 3.50, 5.00, 6.50	75/80
	7.75, 8.75	70/75
POLARIZED 1.50	2.00, 3.50, 5.00, 6.50	75/80
Polycarbonate TRANSITIONS®	2.00, 4.25, 5.75	75/80


MINIMUM FITTING HEIGHT: 18 mm

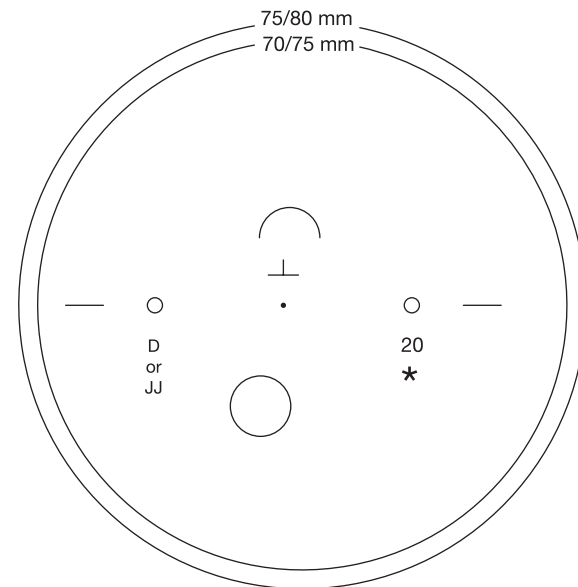

*ENGRAVED MATERIAL KEY
 Polycarbonate
 Transitions®
 C Transitions® 1.50
 C Polarized 1.50

DEFINITY™

PROGRESSIVE LENSES



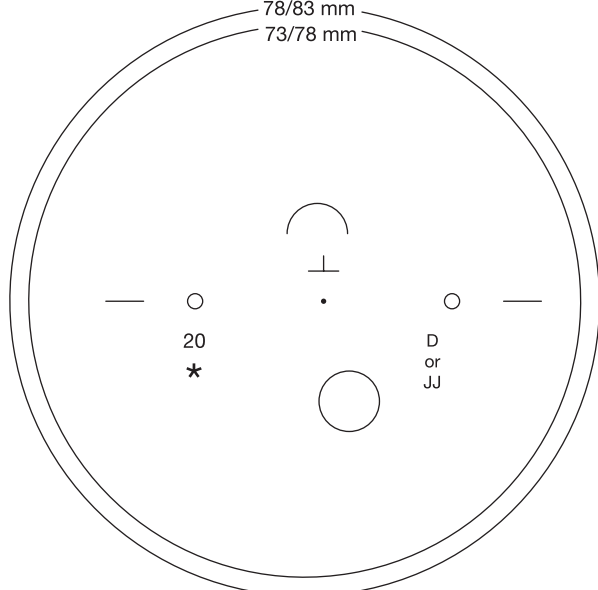


CR-39®, HIGH-INDEX 1.60, AND POLYCARBONATE

PARAMETERS

Material	Base Curve	Diameter
CR-39®	2.00, 3.50, 5.00, 6.50	78/83
	7.75, 8.75	73/78
POLYCARBONATE	2.00, 4.25, 5.75	78/83
	1.00, 7.50, 8.50	73/78
HIGH-INDEX 1.60	2.00, 3.00, 4.25, 5.75	78/83
	1.00, 7.50, 8.50	73/78


MINIMUM FITTING HEIGHT: 18 mm

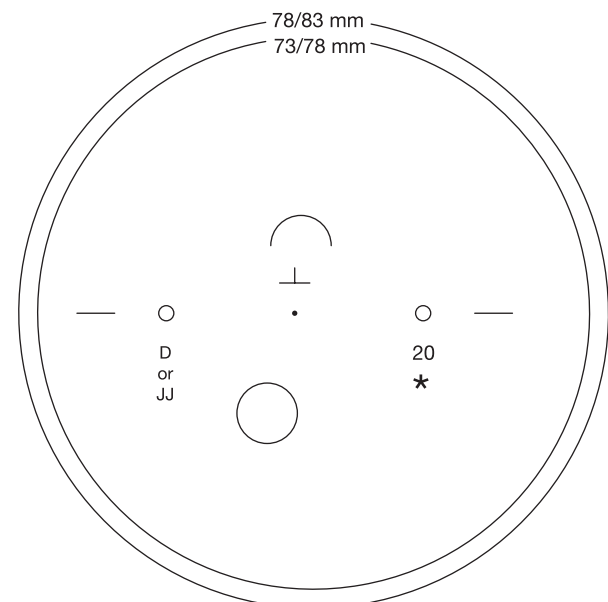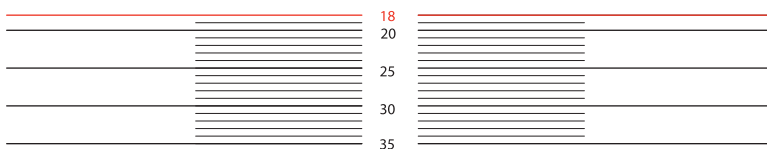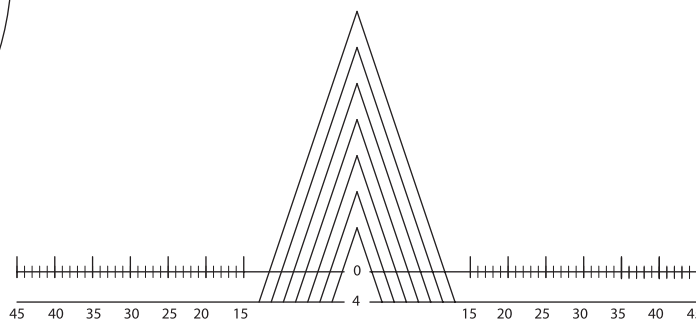

*ENGRAVED MATERIAL KEY
 Polycarbonate
 C CR-39®
 H High-Index 1.60

DEFINITY™

PROGRESSIVE LENSES

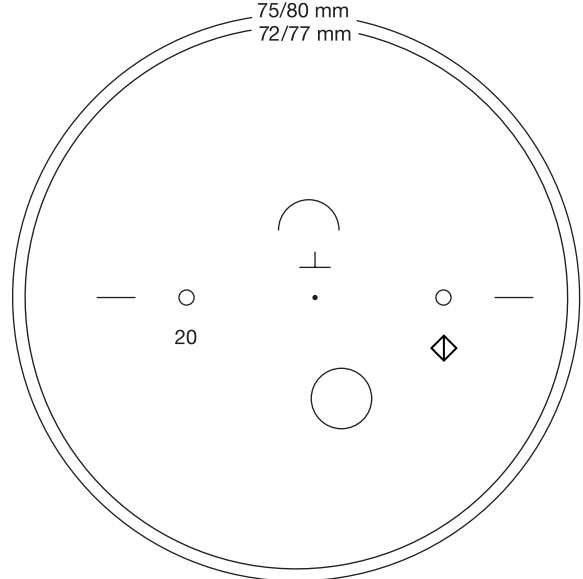


THIN&LITE® 1.67, THIN&LITE® 1.67 TRANSITIONS®, AND TRIVEX®

PARAMETERS

Material	Base Curve	Diameter
THIN&LITE® 1.67	1.50, 7.50, 8.50	72/77
	2.75, 4.25, 5.75	75/80
THIN&LITE® 1.67 TRANSITIONS®	1.50, 7.50, 8.50	72/77
	2.75, 4.25, 5.75	75/80
Trivex®	2.00, 3.50, 5.00	75/80
	6.50, 7.75, 8.50	75/80


MINIMUM FITTING HEIGHT: 18 mm

◇ ENGRAVED MATERIAL KEY
 D 67 Thin&Lite® 1.67
 D 67 Thin&Lite® 1.67 Transitions®
 D* Trivex®

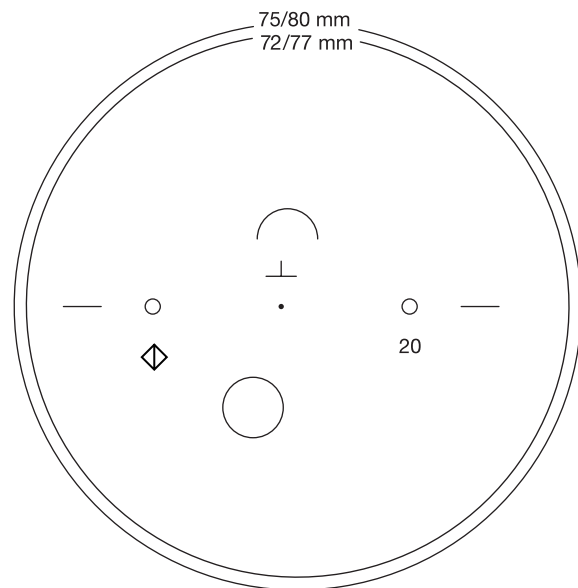

DEFINITY™

DEFINITY™ short™

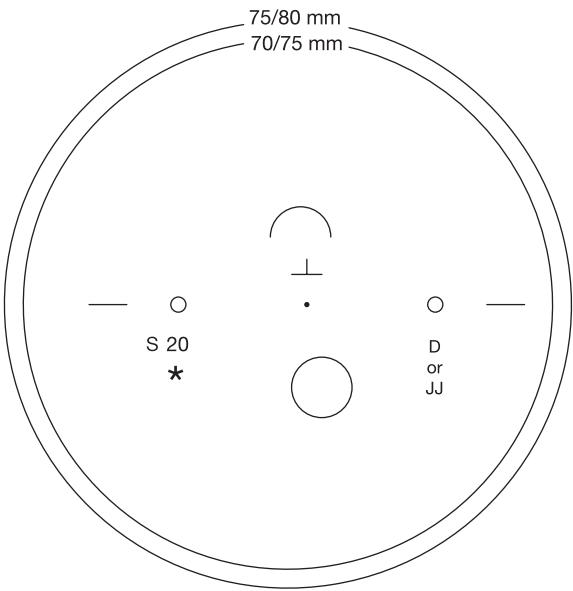


TRANSITIONS® 1.50, POLYCARBONATE TRANSITIONS®, AND POLARIZED 1.50

PARAMETERS


Material	Base Curve	Diameter
TRANSITIONS® 1.50	2.00, 3.50, 5.00, 6.50	75/80
	7.75, 8.75	70/75
POLARIZED 1.50	2.00, 3.50, 5.00, 6.50	75/80
Polycarbonate TRANSITIONS®	2.00, 4.25, 5.75	75/80

MINIMUM FITTING HEIGHT: 15 mm

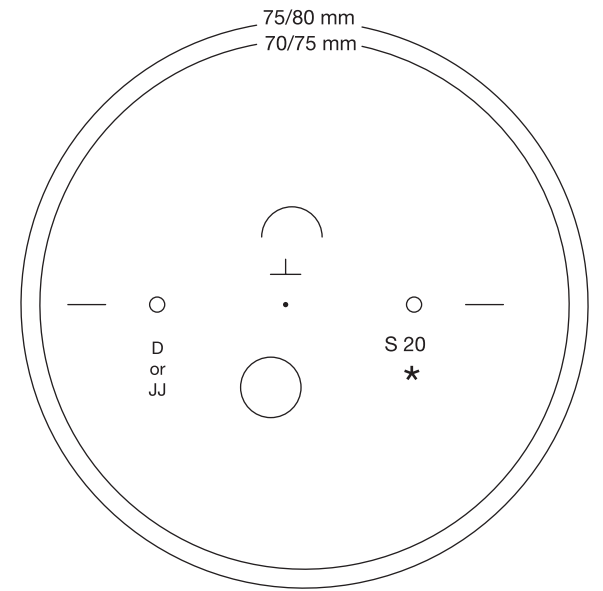

*ENGRAVED MATERIAL KEY
 Polycarbonate
 Transitions®
 C Transitions® 1.50
 C Polarized 1.50

DEFINITY™ short™



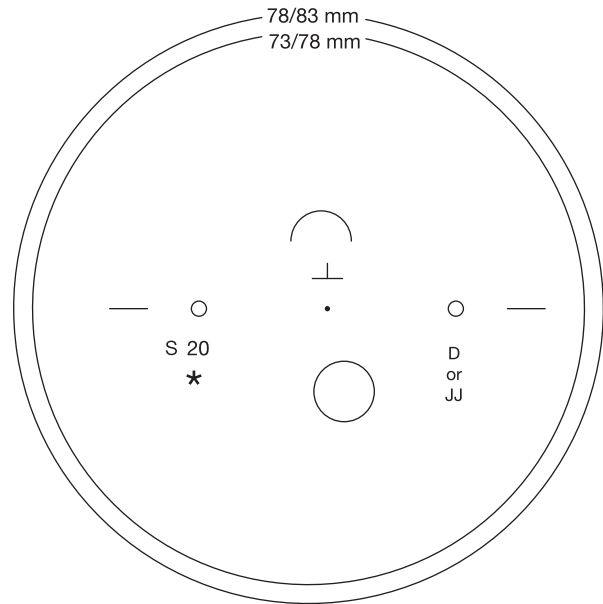


CR-39®, HIGH-INDEX 1.60, AND POLYCARBONATE

PARAMETERS


Material	Base Curve	Diameter
CR-39®	2.00, 3.50, 5.00, 6.50	78/83
	7.75, 8.75	73/78
POLYCARBONATE	2.00, 4.25, 5.75	78/83
HIGH-INDEX 1.60	2.00, 3.00, 4.25, 5.75	78/83
	1.00, 7.50, 8.50	73/78

MINIMUM FITTING HEIGHT: 15 mm

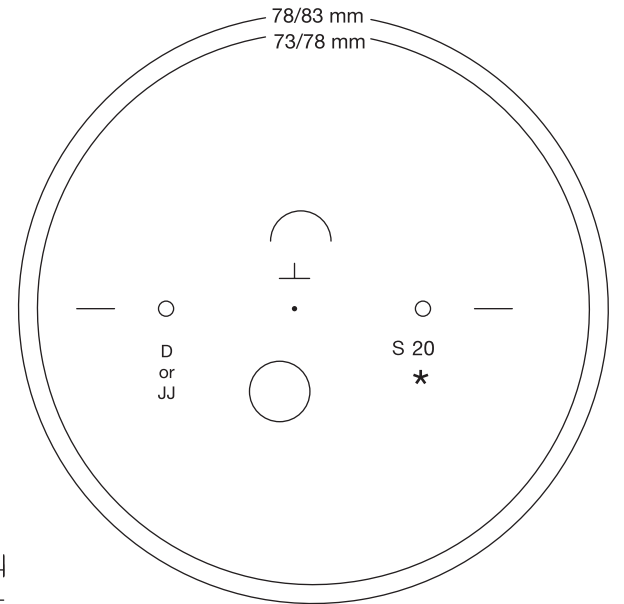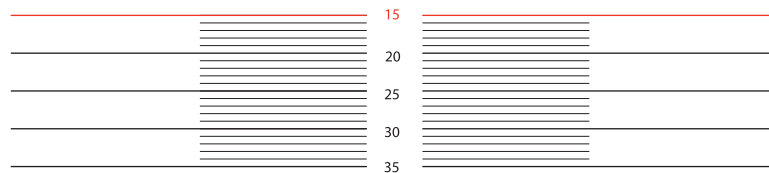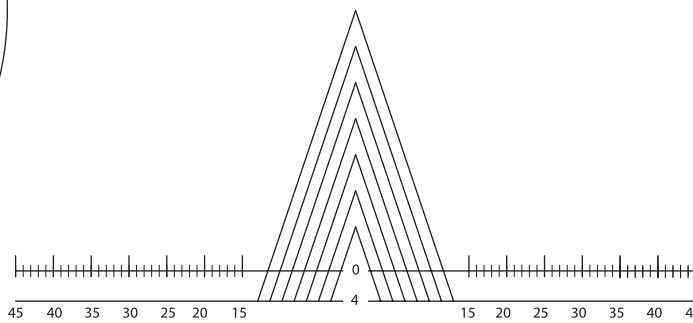

*ENGRAVED MATERIAL KEY
 Polycarbonate
 C CR-39®
 H High-Index 1.60

DEFINITY™ short™

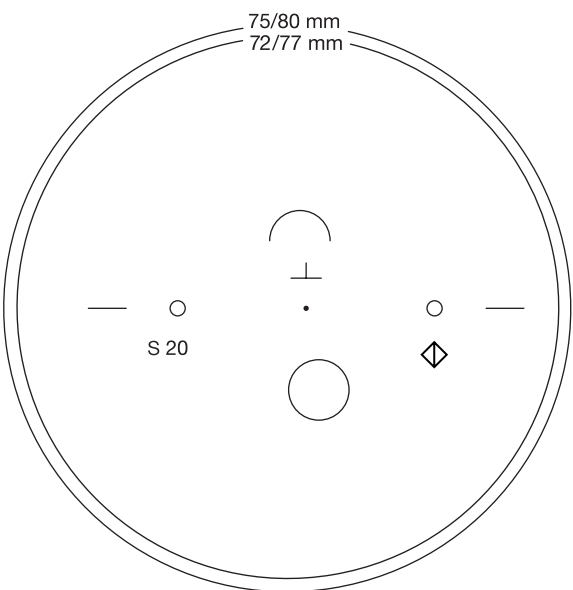


THIN&LITE® 1.67, THIN&LITE® 1.67 TRANSITIONS®, AND TRIVEX®

PARAMETERS

Material	Base Curve	Diameter
THIN&LITE® 1.67	1.50, 7.50, 8.50	72/77
	2.75, 4.25, 5.75	75/80
THIN&LITE® 1.67 TRANSITIONS®	1.50, 7.50, 8.50	72/77
	2.75, 4.25, 5.75	75/80
Trivex®	2.00, 3.50, 5.00	75/80
	6.50, 7.75, 8.50	

MINIMUM FITTING HEIGHT: 15 mm

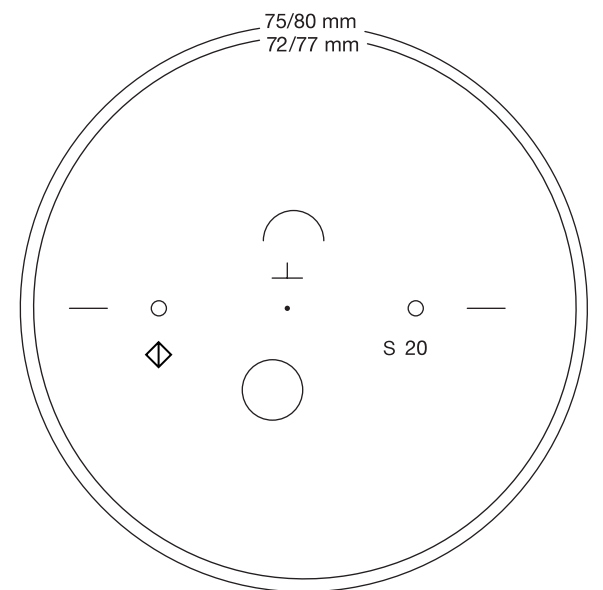

◇ ENGRAVED MATERIAL KEY
 D 67 Thin&Lite® 1.67
 D 67 Thin&Lite® 1.67 Transitions®
 D * Trivex®